

Efficient MAC Protocol for Heterogeneous Cellular Networks (HC-MAC)

¹Y V Adi Satyanarayana, ²Dr. K Padma Raju

¹ Y V Adi Satyanarayana, Assoc. Professor, Dr. Samuel George Inst. of Engg. & Tech., Markapur, A.P, India

² Dr. K Padma Raju, Professor of Electronics & Communications Engineering & Director, Industry Institute Interaction and Placement & Training JNT University Kakinada Andhra Pradesh India

Abstract: This paper details the efficient MAC protocol for heterogeneous Cellular network. Present 3G-cellular radio access network cannot support many concurrent high data rate unicast (or) flows due to limited radio resources. We proposed Mac protocol for heterogeneous cellular network (HC-MAC). The heterogeneous network uses a proprietary protocol for communication within the network and TCP/IP for connection with other networks. Here we study here how the 802.11 medium access control (MAC) protocol can be applied and how it performs in the Heterogeneous cellular network (HC-MAC). By exploiting the fact that timeout intervals are not explicitly specified, without modifying the standard, we propose a new timing structure for the distribution coordination function (DCF) and the handshake of request-to-send (RTS) and clear-to-send (CTS) to handle increased signal propagation delay in Heterogeneous cellular network (HC-MAC). We find that the DCF and RTS/CTS protocols as specified in the standard continue to work properly for a link distance up to 6 km. Our analysis reveals that the DCF performance degrades slightly in the 802.11 network with cell size of 6 km when compared with the 600 m WLAN. Thus, as far as the MAC protocol is concerned, the Heterogeneous cellular network (HC-MAC), with 8 km cell size is feasible.

Keywords:- Heterogeneous networks, IEEE 802.11, 3G/4G, Cellular network, Quality of service.

I. Introduction

Today the development of Cellular communication technologies is actively developing, testing and deploying third generation (3G) wireless networks, customers are expecting services with data rate higher than that to be provided by 3G networks. To meet such demand for better quality of service (QoS) [1] and security [2]. Many companies have started to provide high-speed data services using wireless local-area-networks (WLAN) in places such as airports and hotels. Such an approach is particularly attractive due to the maturity and low cost of the IEEE 802.11b technology [199b, VAM99]. The 802.11b network provides data rates up to 11 Mbps, far exceeding that to be offered by, for example, EDGE [SAE98, CQW99] and W-CDMA networks [HT00].

Besides high data rates, 802.11b networks offer several advantages over 3G network: The cost of 802.11b equipment is much lower than that for 3G equipment because of the simple design of the former networks, coupled with competition among WLAN vendors. Second,

802.11b networks operate in the 2.4 GHz ISM band, which is free spectrum. In contrast, the 3G spectrum is licensed and very expensive. Thus, both reasons make the operating cost of the 3G network higher than that of WLAN.

Similarly, each WLAN can serve only a small area, up to a few hundred meters, where a cell radius of 10 kilometers is supported in the 3G networks. In addition, future 3G networks are expected to provide ubiquitous coverage and availability. In contrast, public WLAN service is available only in isolated places such as airports and hotels. Users will use both types of networks, one for excellent coverage while the other for enhanced data rates.

In this research, we explore the following question: Is it possible to design HC-MAC, cellular network based on the existing 802.11 air-interface standard for wireless data services? If the answer is affirmative, then users can use the same air-interface mechanism to obtain wireless services from indoor WLAN and outdoor 802.11 networks. There are many technical issues pertinent to the design of an 802.11 cellular network.

Recall that 802.11 as well as its extension 802.11b [199b] and 802.11a [199a] standards were developed specifically for WLAN with the transmission range up to a few hundred meters in indoor environment. First, the signal propagation delay increases when applying the 802.11 to outdoor networks relative to the indoor WLAN, which in turn may affect the applicability of the medium access control (MAC) protocol. Second, the outdoor environment has increased delay spread that causes intersymbol interference. Further, Doppler effects due to mobility may require sophisticated processing for channel estimation and QoS.

We focus this paper on the MAC protocol design and performance when using the 802.11 specification for HC-MAC cellular networks, while radio issues will be addressed in our subsequent papers. Much work related to the 802.11 MAC protocol has been published; see e.g., [B00], [CCG00] and [VCM01].

The rest of the work is organized as follows in section II. We provide an overview of the IEEE802.11 standards in section III. We provide how the protocols may or may not work properly in the heterogeneous network, we estimate the maximum cell radius in heterogeneous cellular networks due to consideration of MAC protocols. In section IV we analyze the MAC protocol performance for heterogeneous cellular networks and finally in section V we conclude the results.

Overview of IEEE 802.11

IEEE 802.11 is the leading standard for wireless LAN [3]. It adopts the standard 802 logic link control (LLC Protocol) but provides optimized physical layer (PHY) and medium access control (MAC) sub layers for wireless communications. 802.11 specifies two physical layers. 1. Direct Sequence Spread Spectrum (DSSS) and 2. Frequency Hopping spread spectrum (FHSS). Based on transmission technologies and operating spectrum the next generation will propose 802.11 can be classified into three categories: 802.11a (orthogonal frequency division multiplexing, OFDM, 5GHz), 802.11b (High rate DSS, HR/DSSS, and 2.4 GHz), and 802.11g (OFDM, 2.4 GHz). 802.11b is based on HR/DSSS and operates at 2 GHz industrial, scientific, Medical (ISM) bandwidth transmission rate from 1 to 11 MBPS. 802.11a is based on OFDM and use 5 GHz and licensed national information infrastructure (U-NII) band in America with a transmission rate of 6-54 MBPS. 802.11g is also based on OFDM but uses 2.4 GHz ISM Band and was formally ratified by the IEEE standards associations' standard board in June 2003. This specifies maximum transmission rate of 54 MBPS. The same as 802.11a. The family IEEE 802.11 standards are as shown in Table 1.

The 802.11 MAC supports two medium access protocols: Contention based distributed co ordination function (DCF) and optional point co ordination function (PCF). When the PCF is enabled, the wireless channel is divided into super frames. Each super frame consists of a contention free period (CFP) for PCF and a contention period for DCF. From the beginning of CFP the point coordinator (usually the access point (AP)) contends for access to the wireless channel. Once it acquires the channel, it cyclically polls high priority stations and grants them the privilege of transmitting. Also the optional PCF is designed for delay bounded services, and also it is centralized and also used for network infrastructure mode.

A The PCF Protocol

In IEEE 802.11 specification [197] the PCF protocol, an AP polls its associated mobile stations one after another by sending polling messages. If the AP has data to send to a mobile station being polled, the data can be included in the polling message. If the polled station has data for the AP, it is sent in the response message. When applicable, an acknowledgment (which acknowledges receipt of a previous data frame from the AP) can also be included in the response message.

As an illustrative example in Figure 1, the AP first sends the polling message and data, if any, to mobile station 1 (denoted by S1). Station 1 should immediately send an acknowledgment or a data frame, if any, to the AP within the SIFS interval. After receiving an ACK or data from station 1, the AP polls mobile station 2 within the SIFS interval. In this illustration, station 2 does not respond, either because the polling message is lost or station 2 has no data to send to the AP. In this case, as a response is not received from station 2 before the SIFS expires, the AP moves on to poll station 3 within the PIFS interval, which starts from the end of the last polling message for station 2.

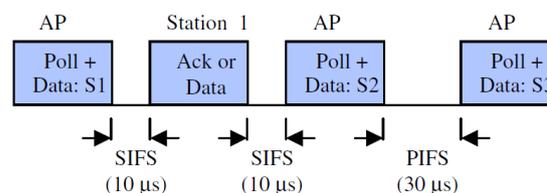


Figure 1. The PCF of the 802.11 MAC Protocol

Task Group	Responsibility
802.11a – OFDM in 5 GHz band	Specification enabling up to 54 MBPS to be achieved in the 5 GHz and licensed radio band by utilizing OFDM.
802.11b – HR/DSSS in 2.4 GHz Band	Specification enabling up to 22 MBPS to be achieved in the 2.4 GHz and licensed radio band by utilizing HR/DSSS.
802.11c – Bridge operation procedures	Provides required information to ensure proper bridge operations, which is required when developing access points.
802.11d – Global Harmonization	Covers additional regulatory domains, which is important for operation in the 5 GHz band.
802.11 e – MAC Enhancements for QoS	Covers use of MAC Enhancements for quality of service such as EDCF service differentiation and coordination function (HCF).
802.11f - Inter access point protocol(IAPP)	Provides inter operability for users roaming from one access point to another of different vendor.
802.11g – OFDM in 2.4 GHz band	Specification enabling high data rates (36 or 54 MBPS) to be achieved in the 2.4 GHz unlicensed radio band.
802.11h – Dynamic frequency selection (DFS)Dynamic channel selection and transmission power control.	
802.11i – Security	Specification for WLAN security to replace the Weak Wired Equivalent Privacy (WEP).

Table1: The family of IEEE 802.11 standards

B. The DCF Protocol

The DCF employs the CSMA/CA mechanism and works as follows. A station (including the AP) with a new packet ready for transmission senses whether or not the channel is busy. If the channel is detected idle for a DIFS interval (i.e., 50 μs for 802.11b networks), the station starts packet transmission. Otherwise, the station continues to monitor the channel busy or idle status. After finding the channel idle for a DIFS interval, the station: a) starts to treat channel time in units of slot time, b) generates a random backoff interval in units of slot time, and c) continues to monitor whether the channel is busy or idle. In the latter step, for each slot time where the channel remains idle, the backoff interval is decremented by one. When the interval value reaches zero, the station starts packet transmission. During this backoff period, if the channel is sensed busy in a slot time, the decrement of the backoff interval stops (i.e., is frozen) and resumes only after the channel is detected idle continuously for the DIFS interval and the following one slot time. Again, packet transmission is started when the backoff interval

reaches zero the backoff mechanism helps avoid collision since the channel has been detected to be busy recently. Further, to avoid channel capture, a station must wait for a

backoff interval between two consecutive new packet transmissions, even if the channel is sensed idle in the DIFS interval. This is depicted in Figure 2.

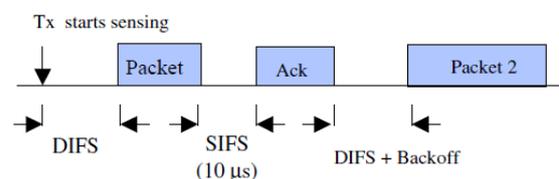


Figure 2. The DCF of the 802.11 MAC Protocol

The backoff mechanism for the DCF is an exponential one. For each packet transmission, the backoff time in units of slot time (i.e., an integer) is uniformly chosen from 0 to n-1, where n depends on the number of failed transmissions for the packet. At the first transmission attempt, n is set to a value of CW_{min}=32, the so-called minimum contention window. After each unsuccessful transmission, n is doubled, up to a maximum value of CW_{max}=1024.

The 802.11 specification requires a receiver to send an ACK for each packet that is successfully received. Furthermore, to simplify the protocol header, an ACK

contains no sequence number, and is used to acknowledge receipt of the immediately previous packet sent. That is, stations exchange data based on a stop-and-go protocol. As shown in Figure 2, the sending station is expected to receive the ACK within the 10 μ s SIFS interval after the packet transmission is completed. If the ACK does not arrive at the sending station within a specified ACK_timeout period, or it detects transmission of a different packet on the channel, the original transmission is considered to have failed and is subject to retransmission by the backoff mechanism.

In addition to the physical channel sensing, the 802.11 MAC protocol implements a network allocation vector (NAV), whose value indicates to each station the amount of time that remains before the channel will become idle. All packets contain a duration field and the NAV is updated according to the field value in each packet transmitted. The NAV is thus referred to as a virtual carrier sensing mechanism. The MAC uses the combined physical and virtual sensing to avoid collision.

The protocol described above is called the two-way handshaking mechanism. In addition, the MAC also contains a four-way frame exchange protocol. Essentially, the four-way protocol requires that a station send to the AP a special, Request-to-Send (RTS) message, instead of the actual data packet, after gaining channel access through the contention process described above. In response, if the AP sees that it is appropriate, it sends a Clear-to-Send (CTS) message within the SIFS interval to instruct the requesting station to start the packet transmission immediately. The main purpose of the RTS/CTS handshake is to resolve the so-called hidden terminal problem.

III. MAC PROTOCOLS IN HETEROGENIOUS CELLULAR NETWORKS

A. The PCF Protocol Infeasible

It is important to emphasize that the SIFS and PIFS timing requirements for the PCF in Figure 1 are clearly defined in the standard. In particular, the most stringent requirement is that the ACK has to be received from the polled station to the AP within the SIFS interval, which is 10 μ s for 802.11b networks. When the standard is used for heterogeneous cellular networks, the distance between a mobile station and its AP is expected to be longer than that in the WLAN. Consider a link distance of 1.5 km as an example. The round-trip signal propagation delay for the 1.5 km distance requires 10 μ s. Since at least several μ s are needed for signal processing at the receiver, the link distance is likely to be limited to hundreds of meters, as in WLAN environments. In fact, this is the intention of the 802.11 specification. Thus, it is unrealistic to expect that the PCF can be supported for 802.11 heterogeneous cellular networks with cell radius of several km.

B. Applicability of the DCF Protocol

Let us consider the DCF in the heterogeneous cellular networks. It is worth noting that as far as the MAC protocol is concerned, the major difference between 802.11 heterogeneous cellular networks and their

WLAN counterparts is increased signal propagation delay. As shown in Figure 2, the major constraint for the applicability of the DCF in heterogeneous cellular networks is that the ACK is expected to be received within the SIFS interval (10 μ s) after packet transmission. That is, the 10 μ s includes the round-trip signal propagation and processing at the receiver. However, in order to be useful, we aim at having an heterogeneous cellular cell size of several km. Thus, the one-way signal propagation delay can be more than 10 μ s, even neglecting the return propagation and processing time. Evidently, this would not be practical without violating the protocol specification. Our solution is based on the following key observation: Typically, there is no consequence if the ACK is received later than the SIFS interval. This is because, after a station transmits a packet, it starts an ACK_timeout period, which is not specified in the standard and is usually chosen to be a value much larger than 10 μ s by vendors. Thus, as long as the ACK is received before the timeout expires, the MAC protocol responds properly.

As in typical implementations, we assume that the ACK_timeout period is longer than the DIFS interval of 50 μ s. Then, we argue that as long as the ACK arrives at the sending station within the DIFS interval following a packet transmission, the DCF operates properly in the heterogeneous cellular network environment where the link distance can reach as much as several km. The reasoning is as follows. First, because the ACK is received within the DIFS interval, the ACK_timeout has not expired so that the protocol can respond upon receipt of the ACK as if it were received within the SIFS interval, as originally specified in the protocol standard. Second, since the DCF protocol requires any station to sense the channel being idle for at least the DIFS interval before transmitting, the return of the ACK within the DIFS interval following the previous packet transmission by the sending station prevents any stations other than the receiving one from gaining access to the channel. Consequently, the channel is implicitly "reserved" for the receiving station to send the ACK. In addition, the pairing of a packet transmission and its ACK transmitted in sequence for any pair of sending and receiving stations remains intact, as required by the specification.

Extending the arrival delay of ACK from the SIFS to the DIFS interval comes with a penalty. That is, the computation of the NAV assumes that the ACK returns within the SIFS interval. So, the delay extension causes an erroneous determination of the NAV, thus incorrect virtual sensing. Nevertheless, since protocol operations are based on both physical and virtual channel sensing, as long as the former works properly, the malfunctioning of the virtual sensing due to incorrect NAV value causes no apparent, negative impacts.

Actually, the extension of the ACK arrival delay from the SIFS interval to the DIFS interval can also be applied to the RTS and CTS handshake for resolving the hidden terminal problem. Specifically, a sending station starts a CTS_timeout period after sending an RTS. The MAC protocol specifies that the CTS, if any, is supposed to arrive from the receiving station within the SIFS interval

(10 μ s). However, similar to the ACK_timeout, the CTS_timeout period is typically chosen to be much longer than 10 μ s by equipment manufacturers. Therefore, by the same arguments discussed above, the arrival delay for the CTS can be extended to the DIFS interval.

C Maximum Cell Size for the DCF Protocol

With the arrival delay for the ACK and CTS extended to the DIFS interval, let us consider its limit on the maximum cell size (i.e., link distance) in heterogeneous cellular 802.11 networks.

Recall that the ACK and CTS arrival delay consists of a round-trip signal propagation delay and signal processing time. As shown in Figure 3, one reasonable allocation of the 50 μ s DIFS delay is: a one-way signal propagation delay of 20 μ s and a processing time of 10 μ s at the receiving station. The latter should not cause a processing burden for the receiver because the original delay of the SIFS interval is 10 μ s. For the 20 μ s propagation delay, the maximum cell size is about 6 km. In other words, with the cell size of 6 km or less, the DCF protocol operates properly in 802.11 cellular networks.

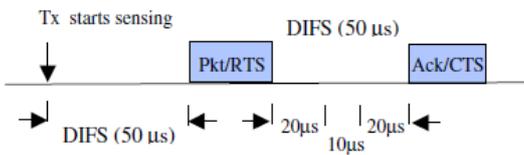


Figure 3. Allocation of ACK/CTS delay

IV. DCF PERFORMANCE IN 802.11 HETEROGENIOUS CELLULAR NETWORKS

We present an approximate analysis of the DCF throughput for heterogeneous cellular networks and WLAN. As shown in Figure 3, if a station with a packet for transmission senses the channel idle for the DIFS interval (denoted by d in μ s in the following), it starts to transmit. Following the packet transmission, the channel remains idle for the DIFS interval and then the ACK is transmitted by the receiver. If the sending station senses the channel busy, it goes through the backoff mechanism discussed above. For simplicity, we do not model the details of the backoff algorithm. Instead, it is assumed that the aggregated traffic, which includes new packets and transmission reattempts, from all stations forms a Poisson process with an intensity of G packets/ μ s. This assumption is reasonable if the backoff period is sufficiently long so that new transmission and reattempts become independent sources. For simplicity, assume that the signal propagation delay a in μ s is identical between any pair of stations. Thus, the *vulnerable period* is also given by a , during which a new packet transmission cannot be sensed by other stations. As a result, these stations under the CSMA protocol can possibly start their own transmissions and cause collisions. Each station senses the channel idle for d μ s (DIFS interval) before transmitting. The packet transmission time is assumed to be constant L μ s. Consider the channel activity for a successful packet transmission. The channel is idle for d μ s and followed by packet transmission of L μ s. As Figure 3 shows, the transmitter waits for d μ s (DIFS

interval) for the ACK. Let the ACK transmission time be c μ s. The channel is sensed idle again by all stations a μ s after the ACK transmission.

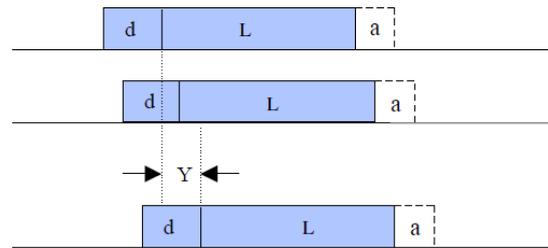


Figure 4. Busy period with Collided Transmissions

Figure 4 shows a typical busy period with collided transmissions due to the vulnerable period for the CSMA protocol, where Y denotes the time span between the first and the last packet transmissions in the busy period. Using the result in [K76], the average duration of Y is given by

$$\bar{Y} = a - \frac{1 - e^{-aG}}{G} \tag{1}$$

The average length of a busy period (which contains a successful transmission or collisions) is given by

$$\bar{B} = d + \bar{Y} + L + a + (d + c)e^{-aG} \tag{2}$$

Where the last term accounts for the waiting and transmission time of the ACK for successful transmission with probability e^{-aG} , based on the Poisson assumption of aggregated traffic. By the same assumption, the average cycle time, consisting of a busy period and the following idle period, is given by

$$\bar{T} = d + \bar{Y} + L + a + (d + c)e^{-aG} + \frac{1}{G} \tag{3}$$

The channel throughput S is defined as the fraction of time at which data is successfully transmitted. Thus, we have

$$S = \frac{Le^{-aG}}{T} \tag{4}$$

Where the numerator is the average amount of time when data is transmitted without collision and T is obtained from (3). Three common packet sizes of 60 bytes (e.g., TCP ACK), 576 bytes (typical size for web browsing) and 1500 bytes (the maximum size for Ethernet) plus a 34 byte 802.11 MAC header are considered. For an 802.11 network with a 1 Mbps data rate, the corresponding transmission time L is 0.75, 4.88 and 12.27 msec, respectively. The sensing idle time of the DIFS interval of 50 μ s and the transmission time c for the 112-bit ACK is 0.112 μ s. Based on our discussions above, the link distance is assumed to be 6 km, and thus the one-way propagation delay a is 20 μ s. For comparison, we also consider a WLAN with a service radius of 600 m with a signal propagation delay of 2 μ s. In this WLAN, after packet transmission, a station waits for the SIFS interval of 10 μ s as in the standard, instead of the DIFS interval as shown in Figure 3, for the arrival of the associated ACK.

Applying these parameters to (1) to (4), we obtain in Figure 5 the MAC throughput as a function of the aggregated traffic load for selected packet lengths. As expected, when the link distance increases from 600 m to 6 km for a given packet length, the maximum throughput decreases because of the increased signal propagation

delay and thus the vulnerable period. For the 576-byte packet size, the maximum throughput drops from 92.9% to 84.8%, when the link distance increases from 600 m to 6 km. Nevertheless, since a 576-byte size is typical for popular web applications, the throughput of 84.8% is still satisfactory. For 1500-byte packets, the channel throughput for the 6 km cell can reach a maximum of 90.8%. Even for the short TCP ACKs of 60 bytes long, the channel throughput is about 60%. In summary, the MAC throughput is still satisfactory despite the increase of cell size to 6 km.

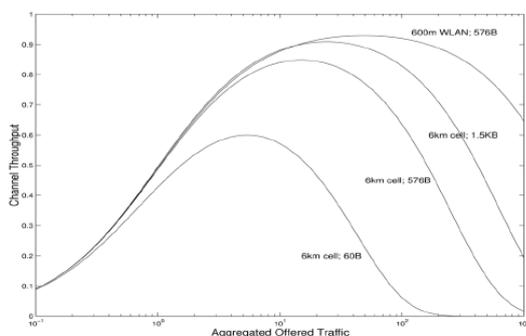


Figure 5. MAC Throughput Comparison.

CONCLUSION AND FUTURE WORK

We have studied how the 802.11 MAC can be applied and how it performs in heterogeneous cellular networks. By exploiting the fact that timeout intervals are not explicitly specified, without modifying the standard, we have proposed a new timing structure for the distribution coordination function (DCF) and the handshake of request-to-send (RTS) and clear-to-send (CTS) to handle increased signal propagation delay in the 802.11 heterogeneous cellular networks. It was found that the DCF and RTS/CTS protocols as specified in the standard continues to work properly if the cell radius is less than 6 km. Our analysis reveals that the DCF performance degrades slightly for a cell size of 6 km when compared with the 600 m WLAN. Thus, as far as the MAC protocol is concerned, the 802.11 cellular network with a cell size of 6 km is feasible.

In terms of future work, a major issue is to examine and enhance the 802.11 radio design so that it performs properly in the cellular environment. In a companion paper [CLMK01], we shall address the issue of radio link performance in the 802.11 cellular networks. We also plan to investigate techniques such as advanced equalizers, smart antennas and call admission control to further improve the performance of the heterogeneous cellular 802.11 cellular networks.

References

1. S.Chakrabarti and A.Mishra. Qos issues in ad hoc wireless networks. IEEE personal Communication Magazine, pages 142-148, Feb 2001
2. Z.Zhou and Z.hass. Secure ad hoc networks. IEEE networks, 13(6):24-30, 1999
3. M.Li, B.Prabhakaran, and S. Sathyamurthy, "On flow Reservation and Admission Control for Distributed Scheduling Strategies in IEEE802.11 Wireless LAN." Proc. 6th ACM Int'l. Wksp. Modeling, Anal and Sim. Wireless and Mobile Sys, Sept. 2003

[199b] IEEE 802.11b, "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specification: High-Speed Physical Layer Extension in the 2.4 GHz Band," 1999.

[VAM99] R. van Nee, et. al., "New High-Rate Wireless LAN Standard," IEEE Commun. Mag., Dec. 1999, pp. 82-88.

[SAE98] P. Schramm, et. al., "Radio Interference Performance of EDGE, a Proposal for Enhanced Data Rates in Existing Digital Cellular Systems," Proc. of IEEE VTC, Ottawa, Canada, May 1998, pp. 1064- 1068.

[CQW99] J. Chuang, X. Qiu and J. Whitehead, "Data Throughput Enhancement in Wireless Packet Systems by Improved Link Adaptation with Application to the EDGE System," Proc. of IEEE VTC'99, Sept. 1999.

[199a] IEEE 802.11a, "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specification: High-Speed Physical Layer Extension in the 5 GHz Band," 1999.

[199b] IEEE 802.11b, "Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specification: High-Speed Physical Layer Extension in the 2.4 GHz Band," 1999.

[VCM01] M. Veeraraghavan, N. Cocker and T. Moors, "Support of Voice Services in IEEE 802.11 Wireless LANs," Proc. of IEEE Infocom 2001, Anchorage, Alaska, April 2001, pp. 488-497.

[B00] G. Bianchi, "Performance Analysis of the IEEE 802.11 Distributed Coordination Function," IEEE J. Selected Areas in Commun., Vol. 18, March 2000, pp. 535-547.

[CCG00] F. Cali, M. Conti and E. Gregori, "Dynamic Tuning of the IEEE 802.11 Protocols to Achieve a Theoretical Throughput Limit," IEEE/ACM Trans. On Networking, Vol. 8, Dec. 2000, pp. 785-799.

[K76] L. Kleinrock, Queueing Systems, Vol. 2: Computer Applications, John Wiley & Sons, 1976, p. 398.

[CQW99] J. Chuang, X. Qiu and J. Whitehead, "Data Throughput Enhancement in Wireless Packet Systems by Improved Link Adaptation with Application to the EDGE System," Proc. of IEEE VTC'99, Sept. 1999.